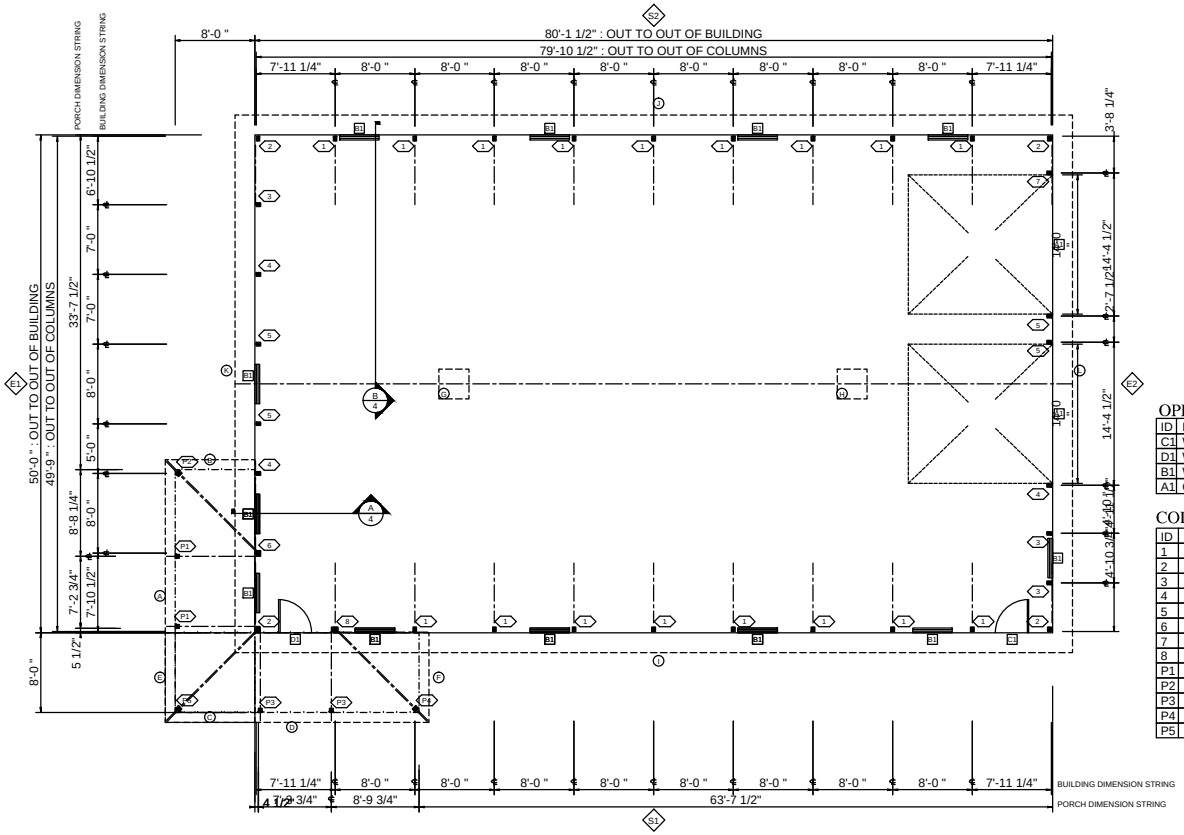

Floor Plan

OPENING SCHEDULE

ID	MODEL	COLOR	NOMINAL	ROUGH	FRAME	FINISH
C1	WLK DOOR 5100 X-BUCK & 22X36		36x80	40x81		
D1	WLK DOOR 5100 X-BUCK & 22X36		36x80	40x81		
B1	WINDOW VINYL CASEMENT THERMA	B Wht	48x36	47.5x35.75		
A1	OVERHEAD DOOR OPENING - CUST		168x174		NA	LK424

COLUMN SCHEDULE

ID	PART	SHAPE	LENGTH	BASE	FOOTING	TYPE	YARDS/BAGS	NOTES
1	C004	FS666	24'-0"	-64	8 x 36	POURED	0.1745	EF132
2	C005	FE666	24'-0"	-64	8 x 18	POURED	0.0436	EF132
3	C006	FE666	26'-0"	-64	8 x 18	POURED	0.0436	EF132
4	C007	FE666	28'-0"	-64	8 x 18	POURED	0.0436	EF132
5	C008	FE666	30'-0"	-64	8 x 18	POURED	0.0436	EF132
6	C009	FE6666	26'-0"	-64	8 x 28	POURED	0.1056	EF132
7	C010	FE666	24'-0"	-64	8 x 18	POURED	0.0436	EF132
8	C011	P6FS666P6	24'-0"	-64	9 x 36	POURED	0.1963	EF132
P1	681806	f6FS444	16'-0"	-64	8 x 18	POURED	0.0842	EF132
P2	681866	f8FS4444	16'-0"					EF132
P3	681806	f6FS444	16'-0"	-64	8 x 18	POURED	0.0436	EF132
P4	681866	f8FS4444	16'-0"					EF132
P5	681866	f8FS4444	16'-0"					EF132

LESTER BUILDINGS

DEALER INFO.	CUSTOMER INFO.	BUILDING DESCRIPTION	Customer Approval	PROJ: 031A-14200-00-01
Ron Foust , MN		50'-0"x80'-1"x16'-0" U1C QP101812	(Initials) DATE: 11/14/2012	PROPOSAL DRAWINGS ONLY Not Intended for Construction Purposes * Not To Scale *