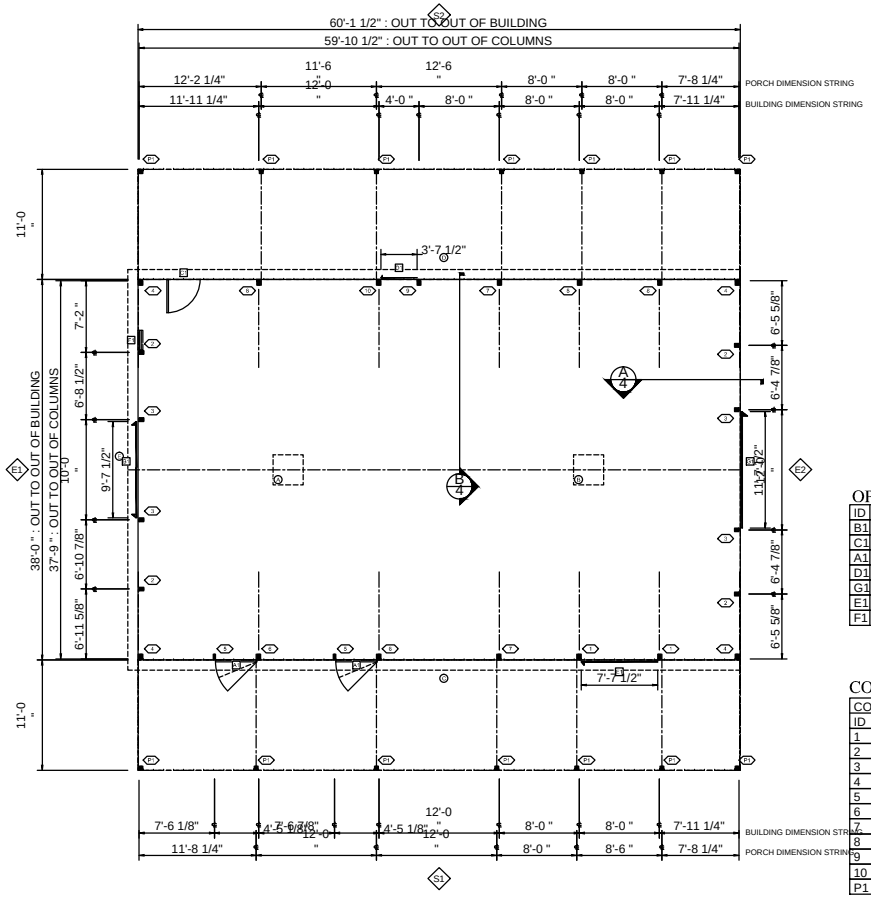

Floor Plan

OPENING SCHEDULE

ID	MODEL	COLOR	NOMINAL	ROUGH	FRAME	FINISH
B1	COLT	NA	120x120	115.5x120		
C1	WLK DOOR 5100 X-BUCK & 22X36		36x80	40x81	KC432,KC430	KC471,KC470
A1	LESTER SPLIT DUTCH DOOR		48x88	49.375x87.375		
D1	8' HIGH METAL CLAD SLIDING D	NA	48x96	43.5x96		
G1	16' HIGH METAL CLAD SLIDING	NA	144x192	139.5x180		
E1	8' HIGH METAL CLAD SLIDING D	NA	96x96	91.5x96		
F1	WINDOW VINYL SGL HUNG THERMA	Clay	24x36	23.5x35.75	KB432,KC425	KB451,KB450

COLUMN SCHEDULE

COLUMN					FOOTING				ANCHOR		
ID	PART	SHAPE	LENGTH	BASE	SIZE	TYPE	YDS/BGS	DET	TYPE	BRS/BLTS	DET
1	691172	FS666	22'-0"	-52	8 x 24	PRECASTPLUS	3	EF202	BLOCK	0	EF211
2	692224	FE666	24'-0"	-52	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
3	692226	FE666	26'-0"	-52	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
4	692222	FE666	22'-0"	-52	8 x 24	PRECASTPLUS	3	EF201	BLOCK	0	EF211
5	C004	FS66	12'-0"	-52	4 x 17	PRECAST	0	EF201	-	-	-
6	691172	FS666	22'-0"	-55	10 x 28	PRECASTPLUS	5	EF202	BLOCK	0	EF211
7	691172	FS666	22'-0"	-55	9 x 24	PRECASTPLUS	4	EF202	BLOCK	0	EF211
8	691172	FS666	22'-0"	-55	8 x 24	PRECASTPLUS	3	EF202	BLOCK	0	EF211
9	C005	FS666	22'-0"	-52	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
10	691172	FS666	22'-0"	-52	9 x 28	PRECASTPLUS	5	EF202	BLOCK	0	EF211
P1	681806	f6FS444	16'-0"	-52	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211

LESTER BUILDINGS

DEALER INFO.

Corey Larsen
473 Wilson St
Winona, MN 55987

CUSTOMER INFO.

BUILDING DESCRIPTION

38'-0"x60'-1"x15'-0"
Uni-Frame Embedded
QP042315

Customer Approval

(Initials)

DATE: 5/19/2015

PROJ: 055A-13014-01-01

PROPOSAL DRAWINGS ONLY
Not Intended for Construction Purposes

The information presented in this drawing is based on a preliminary design using the input provided. The final design is subject to Lester Engineering review.

* Not To Scale *