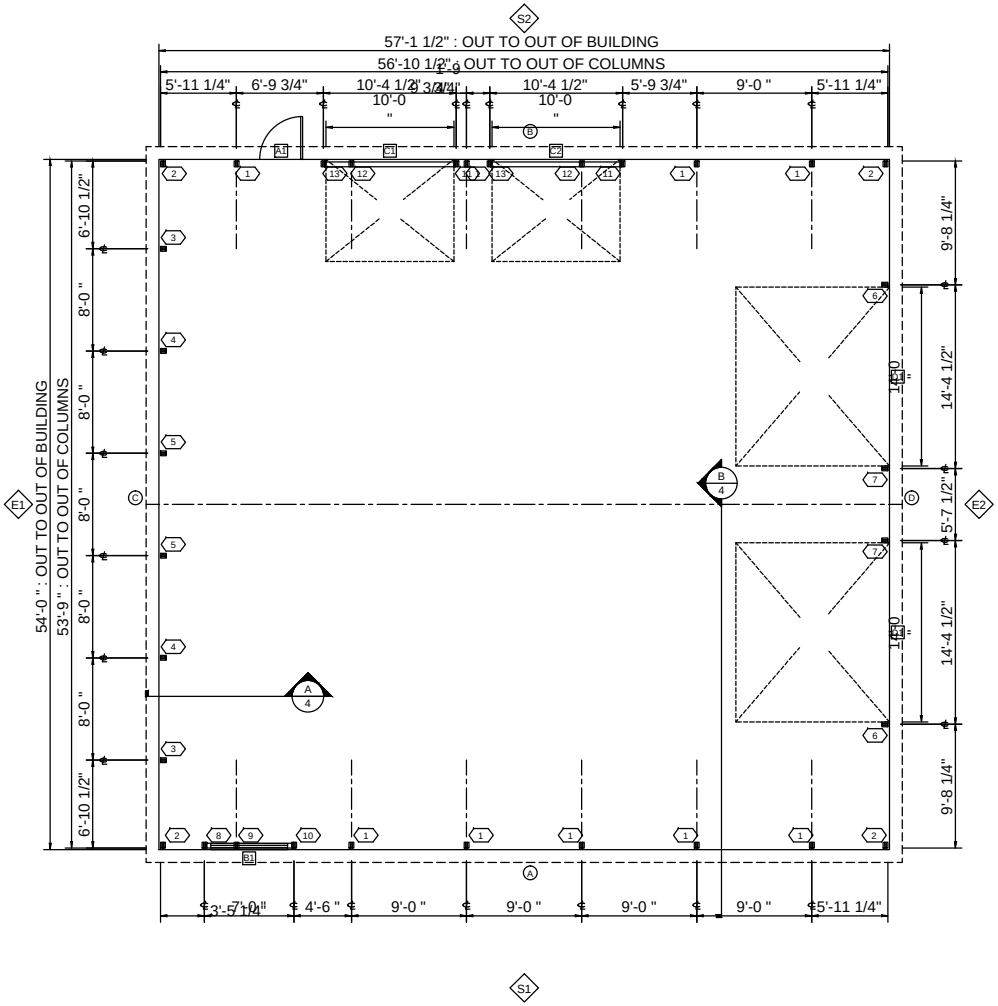

OPENING SCHEDULE

ID	MODEL	COLOR	NOMINAL	ROUGH	FRAME DET	FINISH DET
A1	WLK DOOR 5100 X-BUCK & 22X36	NA	36 x 80	40 x 81	NA	NA
B1	WINDOW - FURNISHED BY OTHERS		72 x 60	72 x 60	NA	NA
C1	T52F VALUE+ FLUSH INSULATED	NA	120 x 96	120 x 96	NA	NA
C2	T52F VALUE+ FLUSH INSULATED	NA	120 x 96	120 x 96	NA	NA
D1	T52F VALUE+ FLUSH INSULATED	NA	168 x 144	168 x 144	NA	NA

COLUMN SCHEDULE

ID	PART	SHAPE	LENGTH	BASE	FOOTING	TYPE	YARDS/BAGS	NOTES
1	C003	FS666	16'-0"					
2	695226	FE666	16'-0"					
3	695228	FE666	18'-0"					
4	695230	FE666	20'-0"					
5	695234	FE666	24'-0"					
6	695230	FE666	20'-0"					
7	695234	FE666	24'-0"					
8	C004	FS66J6	16'-0"					
9	C005	FS666	8'-0"	89.25		HEADER		
10	C006	J6FS66	16'-0"					
11	C004	FS66J6	16'-0"					
12	C007	FS666	6'-0"	108.75		HEADER		
13	C006	J6FS66	16'-0"					

Floor Plan

LESTER BUILDINGS

DEALER INFO.
SL Construction, LLC
302 SW Outer Road, Apt. A
Archie, MO 64725

CUSTOMER INFO.
Thurman Flanary
18907 E. State RT A
Archie, MO 64725

BUILDING DESCRIPTION
54'-0"x57'-1 1/2"x14'-0"
U2C
QP102110

Customer Approval

(Initials)

DATE: 11/2/2010

PROJ: G53A-11173-00-01

PROPOSAL DRAWINGS ONLY
Not Intended for Construction Purposes
* Not To Scale *