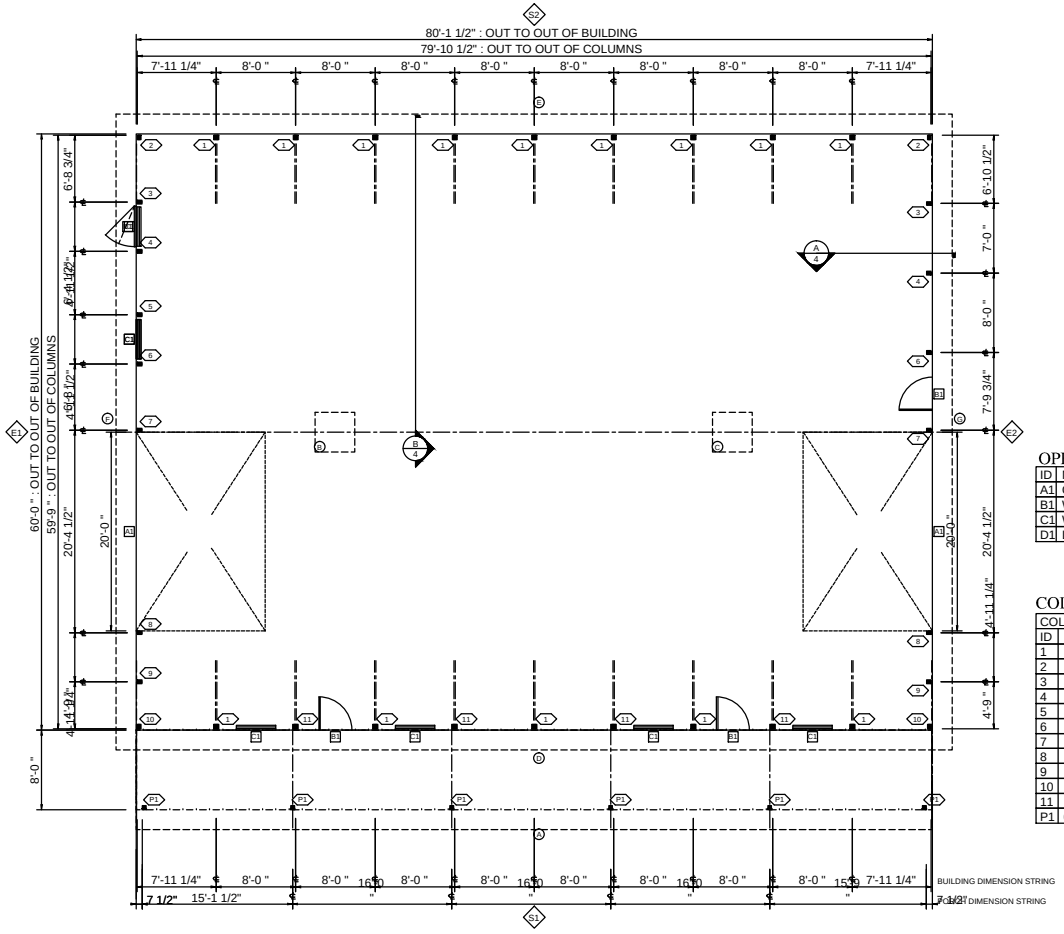

Floor Plan

OPENING SCHEDULE

ID	MODEL	COLOR	NOMINAL	ROUGH	FRAME	FINISH
A1	OVERHEAD DOOR OPENING - CUST		240x156		NA	LK424
B1	WLK DOOR 5100 X-BUCK & 22X36		36x80	40x81	KC434,KC430 KC471	KC470
C1	WINDOW VINYL SLIDER THERMAL	B Wht	48x48	47.5x47.75	KB434,KC427 KB451	
D1	LESTER SPLIT DUTCH DOOR	B Wht	48x88	49.375x87.375	KA173,KA177 MSF-20	

COLUMN SCHEDULE

COLUMN					FOOTING				ANCHOR		
ID	PART	SHAPE	LENGTH	BASE	SIZE	TYPE	YDS/BGS	DET	TYPE	BRS/BLTS	DET
1	C004	FS6666	24'-0"	-76	9 x 36	POURED	0.1963	EF203	BLOCK	0	EF211
2	C005	FE666	24'-0"	-76	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
3	C006	FE666	26'-0"	-76	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
4	C007	FE666	28'-0"	-76	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
5	C008	FE666	30'-0"	-76	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
6	C009	FE666	32'-0"	-76	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
7	C010	FE666	36'-0"	-76	8 x 25	POURED	0.0842	EF202	BLOCK	0	EF211
8	C011	FE666	26'-0"	-76	8 x 18	POURED	0.0436	EF202	BLOCK	0	EF211
9	C012	FE666	24'-0"	-76	4 x 17	PRECAST	0	EF201	BLOCK	0	EF211
10	C013	FE666	24'-0"	-76	9 x 36	POURED	0.1963	EF203	BLOCK	0	EF211
11	C014	FS6666	24'-0"	-76	10 x 36	POURED	0.2182	EF203	BLOCK	0	EF211
P1	681806	f6FS444	16'-0"	-76	8 x 18	POURED	0.0436	EF202	BLOCK	0	EF211

LESTER BUILDINGS

DEALER INFO.	CUSTOMER INFO.	BUILDING DESCRIPTION	Customer Approval
Steve Gustafson 1802 South 10th Street Brainerd, MN 56401	Richard Borg 5831 Rarika Road Duluth, MN 55810	60'-0"x80'-1"x14'-6" U1C QP022014	(Initials) DATE: 2/26/2014

PROJ: 051A-12247-03-01

PROPOSAL DRAWINGS ONLY
Not Intended for Construction Purposes
* Not To Scale *